
Canfield Pro Collection 52 Inch Canfield Pro LED Fan NI

330013NI (Brushed Nickel)



Dimensions

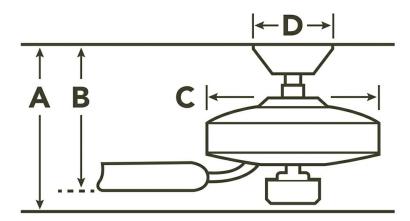

Downrod	Α	В	С	D
1.00 OD X 4.00	17.25	11.00	12.50	6.25

Available Finishes

Finish Fixtu	Glass	Blade 1 Blade	2
--------------	-------	---------------	---

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Product Information

Product ID	330013NI
Finish	Brushed Nickel
Blade Finish	Cherry/Walnut
Collection	Canfield Pro Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	160	5659	81	.58	70
Med	109	4105	102	.51	40
Low	64	2288	148	.35	16

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	Wood
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Primary Control System	3 Speed Wall Control Ltd Function - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.
Remote Included	No
Wall Control Included	Yes
Low Ceiling Adaptable	Yes, With Optional Flush Mount
Lead Wire Length	78.00"
Motor Size	172MM X 20MM
Motor Type	AC INDUCTION

Downlight


Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Included



7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

Notes

Information provided is subject to change without notice.
 All values are design or typical values when measured under laboratory conditions.





Canfield Pro Collection 52 Inch Canfield Pro LED Fan NI

330013NI (Brushed Nickel)

Finish	Fixture	Glass	Blade 1	Blade 2
Matte White	330013MWH	ETCHED CASED OPAL	MATTE WHITE	
Brushed Nickel	330013NI	ETCHED CASED OPAL	CHERRY	WALNUT
Oil Brushed Bronze	330013OBB	ETCHED CASED OPAL	CHERRY	WALNUT

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Downlight Bulb Type	LED
# of Bulbs/LED Modules	1
Watts	70/40/16
Initial Lumens	1600
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000 K
Color Rendering Index	80

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	23.60 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7 feet



